



SA-26,27,28

Wireless 1,2,4-Button Remote Controls

The SA-26,27,28 Wireless 1,2 & 4-Button Remote Controls are compatible with Rosslare's receivers and panels, available in 418 / 433 / 868 MHz fixed frequency.

GENERAL DESCRIPTION

The SA-26,27,28 H are wireless remote controls that have 1,2 and 4 buttons respectively, perfect for controlling Rosslare's wireless security panels and universal receivers, available in 418 / 433 / 868 MHz. The most economical and perfect solution for wireless residential and commercial based security and automation needs.

The SA-26,27,28 are slim, portable, and except for the number of buttons, all three models have the same mechanical enclosure which comes with a belt-clip and a wall mounting attachment.

SA-26,27,28 use state of the art microprocessor design, internal antenna design, and integrated RF with ASK RF technology, built to ISO9001 standards. Each model is encoded with 16 million ID codes, ensuring that multiple units can be used to provide a reliable remote control solution in a single installation.



Model : SA-28



Model : SA-27



Model : SA-26

MAIN FEATURES

- > Fully compatible with a selection of panels, universal receivers, and RF accessories such as repeaters.
- > The SA-28 is designed to be attached to the belt using the belt clip attachment, or mounted on a hook with the wall mount attachment.
- > Small and smooth enough to fit into your pocket or purse comfortably.
- > Microprocessor and SMT Designed electronics for higher quality, and superior performance.
- > LED indicator visually confirms a good transmission signal.
- > Two cells AAA sized replaceable batteries (Model AAA Standard Alkaline Battery) with a long life. Standard available at all supermarkets.
- > Over 16 million random RF ID Codes. Multiple SA-28 units can be programmed to work with a single panel. Anti-collision algorithm for multiple same time operation.

PRODUCT SPECIFICATIONS

Battery: Two 1.5 Volt Alkaline Standard Battery Model AAA. Rosslare recommends to use the following brands:

Energizer, Duracell, Panasonic, Varta

SA-26: 1 Button (1 Ch.) PANIC

SA-27: 2 Button (2 Ch.) ARM / DISARM

SA-28: 4 Button (4 Ch.) ARM / DISARM / PARTIAL PANIC

Operating Temp: 0°C to +50°C
(32°F to + 122°F)

Operating Humidity: Up to 95% Non-Condensing (max.)

Wireless Transmission: 500ms (milliseconds)

RF Frequency: 433.92 MHz, or 418 MHz
or 868.35 MHz, or 916 MHz

Installation: Indoor Use Only
(Not Water Proof)

Supervisor: The SA-26,27 & 28 Remote control transmitters are not supervised.

Tamper: There is no case tamper on the SA-26,27, and 28.


Current: Standby: 0 A
Transmit: 16 mA

Size: 104mm x 40mm x 15mm
(4.09" x 1.57" x 0.59")

Weight: 28 grams Including battery.

APPLICATIONS FOR SECURITY:

The SA-28 can be used with the security panels to remotely control the ARMING, PARTIAL ARMING, DISARMING and PANIC functions.

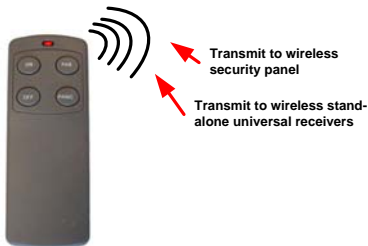

OTHER REMOTE CONTROL FUNCTIONS:

When the SA-28 is connected to a stand alone receiver, any of the buttons can be programmed to any single channel for total control of four different channels.

RADIO TRANSMISSION

The SA-28 has a built in Wireless Transmitter that will transmit signals to control panels or stand alone receivers.

Supervisory Transmission is inactive for the SA-28, which enables the transmitter to be removed from the coverage area of the panel or receiver.

LED Function:
LED will flash when the SA-28 is transmitting

Function:
ARM Button for the Security Panels
or
Single Channel Transmitter

Function:
Disarm Button for the Security Panels
or
Single Channel Transmitter

Function:
Partial Arming Button for the Security Panels
or
Single Channel Transmitter



Function:
Emergency Panic Button for the Security Panels
or
Single Channel Transmitter



SA-26,27,28 H

Wireless 1,2,4-Button Remote Controls

PRODUCT DETAILS

WIRELESS DETECTORS

The SA-26,27,28 offer a variety of options such as panic only capability (SA-26), arm/ disarm capability (SA-27) and 4-Function arm/disarm/partial arm/panic (SA-28).

Control Panel features such as Arming, Partial Arming, Disarming and Personal Emergency (PANIC) functions, can be given by remote control.

Users can call for help to private phone lines with 2-way voice listen in and alarm pre-recorded voice messages




REMOTE USERS

Users can alert a Central Monitoring Station which will relay the alarm to the relevant authorities;

- Ambulance
- Fire Extinguishing
- Police Service

CENTRAL STATION

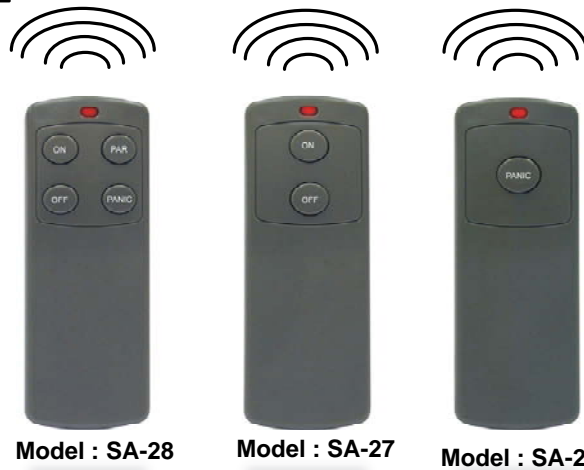

Model : SA-28

Model : SA-27

Model : SA-26


Each of the remote control series, transmitters are small enough to be carried around in the purse, bag or pocket, or backpack. It is suitable for any person, kids, teenagers, and elderly persons use.

LOCAL USERS



Loved Elderly

LOCAL USERS



Teenagers

LOCAL USERS



Kids

