


Universal remote with copy function Art. No. 2600.0928

- Modern, and compact design which fits perfectly in your pocket.
- Four buttons, LED Indicator
- Up to 4 different remotes in ONE.
- Every button can be programmed as a replacement for a different brand, so using only one transmitter you can control up to 4 devices from different producers.
- Replacement for fixed and rolling code remotes with the frequency from 280 to 868 MHz.
- Dimensions: 7x 2.5 x 1cm (L X W X H).

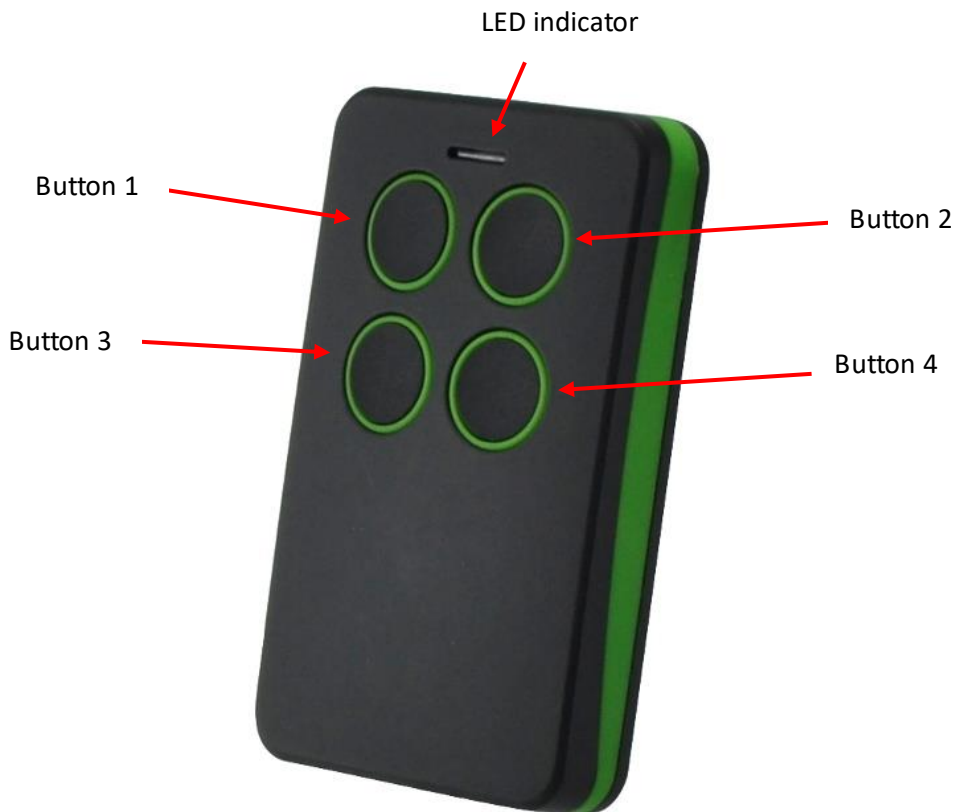

SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

Instructions

Standard Programming

1. Hold button 1 and press button 2 four times, then release both buttons.
 - a. The LED on the universal remote will flash quickly every 2 seconds
2. Press the button to be copied on the original remote and place it about 2-3 cm from the universal remote, head to head, until the universal remote starts flashing quickly.
3. While the universal remote is flashing press the desired button on the universal remote. Cloning is finished when the led turns off.
4. Repeat the process for the other buttons.

AMC Programming: Automatic matching code

Note: For selected models only (see compatibility list)

1. Press the desired button on the universal remote until the receiver emits the code.
2. The LED will flash quickly. Release the button for successful code matching.



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

Seed Code emission

Note: For BFT units only (see section about BFT programming)

1. Press and hold button 1 and 2 on the universal remote at the same time until the LED flashes quickly.
2. Release the 2 buttons and press the desired button. Seed code is then successfully sent.

BFT Programming

1. Hold button 1 and press button 2 four times, then release both buttons.
 - a. The universal remote LED will flash quickly every 2 seconds
2. Place the original remote in front of the universal remote, distance 2-3 cm.
3. Press and hold the desired button on the original remote until the light is constant and then emits a double flash every 2 seconds.
4. Transmit the seed code of the original remote by pressing the hidden button in the rear of the remote or with newer models, press buttons 1 and 2 simultaneously.
5. The LED will flash quickly. Press the desired button to store the copied code. The light will turn off.
6. Use the AMC procedure to pair the new remote with the receiver.



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

FAAC and Genius Programming

Important! Ensure that the remote being copied from is the master.

1. Press any button. The LED should emit a double flash.
2. Hold button 1 and press button 2 four times.
3. Place the original remote at the head of the universal remote about 2-3 cm in distance.
4. Press and hold the desired original remote-control button until the universal remote switches to a constant light and then emits a double flash every 2 seconds.
5. Prepare the FAAC/Genius remote control for sending the seed code by simultaneously pressing button 2 and 3.
6. While the FAAC/Genius LED is flashing, place it in front of the universal remote, 2-3 cm away. Then press the button to copy until remote led begins flashing quicker for confirmation of code copy.

V2 Programming

1. Hold button 1 and press button 2 four times. Then release both buttons.
 - a. The LED of the universal remote will flash quickly every 2 seconds
2. Place the original remote in front of the universal remote about 2-3 cm away.
3. Press and hold the desired button of the original remote until the remote light is constant on and then emits a double flash every 2 seconds.
4. Press and hold the same button on the original remote once again
 - a. Now the LED will flash quickly.
5. Press the desired button on the universal remote for copying until the LED turns off.
6. Use the AMC procedure to pair the new remote with the receiver.



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

Known compatibility list

Brand	Programming	Models
ACM	STANDARD	TX2, TX2 Color, TX4
ADYX	AMC	TE4433H BLUE, 433-HG BRAVO
AERF	STANDARD	COMPACT, HY-DOM, MERCURI B, MERCURY C, SABUTEN, MARS, SATURN, ST3/N, TERRA, TMP-1, TMP-2, UNITECH
ALLMATIC	AMC	BROWN, BROWN RED, BRO.OVER, PASS, MINIPASS, TECH3
APERIO	STANDARD	GO, GO PRO, GO MINI
APERTO (SOMMER)	STANDARD	TX02-434-2, TX02-868-2, BLUE, 4025 TX02-868-2, 4022 TX02-434-2, 4020-TX03-434,
APRIMATIC	AMC	TR2/TR4, TM4, TXM
ATA	STANDARD	PTX4 BLUE, PTX4 PINK
AVIDSEN	STANDARD	104251, 104250, 104250 OLD, 104250 RED, 104257, 104350, 654250
BALLAN	STANDARD	FM400, FM400E, FM404B, 4013
BENINCA	AMC	TO.GO WV, TWV, ROLLKEY, APPLE, LOT, WCV, CUPIDO, TO GO QV, IO, LOT2WCV, LOT1W, LOT2W, LOT4W, LOT1WM, LOT2WM, T2W, T4W
BESIDE	STANDARD	BEZAP, HIT
BFT	BFT and AMC	MITTO, MITTO M (MITTO2M/MITTO4M), MITTO RCB (RCB02/RCB04), MITTO A (MITTO 2A/MITTO4A), MITTO B, TRC (TRC2/TRC4), GHIBLI, MURALE, KLEIO, TE01, TE02, TE04, RB4 MURALE
CAME	STANDARD	T431, T434, TOP432A, TOP434A, TOP432, TAM432SA, TOP432NA
CARDIN	AMC	TRQ S449 (TRQ449100/TRQ449200/TRQ449300/TRQ449400), TRQ 449 GREEN (PRECODE), TXQ S449 (TXQ449200/TXQ449300/TXQ449400), TXQ S449 GREEN, TRQ S486 (TRQ486200/TRQ486300/TRQ486400), TXQ S486 (TXQ486200/TXQ486400), S437 TX, XRADO, S449, S476TX2, S476TX, S486
CASALI	STANDARD	JA33 AMIGO, GENIUS/CASALI A252RC
CASIT	STANDARD	ERTS92B, ERTS92T, ERTS476D, ERTS20DQ, ERTS20DQ, ERTS476D, ERTS476Q
CELISA	STANDARD	S10 1, S10 2



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

CHAMBERLAIN / LIFTMASTER/ MOTORLIFT	STANDARD	953ESTD, 371 LM, 971 LM, 84330E, 94334CE, 94333E/94334E/94335E, 9747E, 1A5639-7, 1A5477, 1A6487, 132B2372, 84330EML/ 9333EML/ 94335EML, 84330EML/ 84333EML/ 84335EML, 8747EML
CLEMSA	STANDARD	MUTANCODE, T, T-8, E-CODE N, MASTERCODE MV
CPS	STANDARD	TCP3.CPS, TCP3.CPS2, TCP3.CPS4, TCP3
DASPI	AMC	HAPPY2, POPS 2, ZERO RC(ZERO 2RC, ZERO 4RC)
DEA SYSTEM	STANDARD	TR MIO, 133 1, 433 2, 433 4, GENIE, PUNTO S2, PUNTO 278, GOLDR, GENIE R 273, GENIE R-GT2N
DELMA	STANDARD	MIXARD 433 1, MIXARD 433 2, KING 433 2
DICKERT	STANDARD	MAHS433 01, MAHS433 04
DITEC	AMC	GOL, GOL4C, BIXLS2, BIXLP2, BIXAG4, BIXLG
DOITRAND	STANDARD	MPSTF2E, JAUNE
DOORMATIC	STANDARD	SAW
DOORHAN	STANDARD	TRANSMITTER 4
DUCATI	STANDARD	TSAW1, TSAW2, TSAW3, 124, TE2
ECOSTAR	STANDARD	RSE, RSC, RSZ
ELBE	STANDARD	501, 502, 504, 502A, 504A
ERREKA	STANDARD	IRIS, ROLLER 2, ROLLER 433, ROLLER 868, SOL433, SOL868, VEGA 433, VEGA 868
ELCA	STANDARD	IRIS, ASTER 2, ASTER 1000, ASTER 1001
FAAC	FAAC	XT4 433 RC, TM1 433 DS, TM2 433 DS, TM3 433 DS, 433L2, 433L4, TM22 433 SLP, TM4 433 SLP, TML 433SLH, TML 868 SLH, DL 868 SLH, XT 868SLH, XT 433 SLH, T 868 SLH, T 433 SLH, XT 433 RC, TE433HG
FADINI	AMC	JUBI-SMALL, 433 M2, ASTRO 433-2, ASTRO 433-4, JUBI2/JUBI4
FERPORT	STANDARD	TAC1, TAC2, TAC4, TAC 1K, TAC 2K, TAC 4K, TAC2KR
GIBIDI	STANDARD	OPEN TMB, OPEN OUT, AU1600, AU1600 WOOD, AU1680, AU1680 WOOD, DOMINO
GULLIVER	STANDARD	MDW
GENIUS	AMC	AMIGO, AMIGOLD, KILO, BRAVO, ECHO
GENIE	AMC	GITR-3, GIT, GICT390, GIFT390-1, G3T-BX, G1T-BX, GM3T, GICTD, GIFTD
GIBIDI	STANDARD	AUO1590, AU1600, DOMI-NO, AU1680 WOOD, GIBIDI, AU1610, AU1810, AUO3000, DTC 4334
HORMANN	STANDARD	HSM2, HSM4
JCM	STANDARD	NEO, TWIN, GO, GO PORTIS, GO NORTON
JAY	STANDARD	UBEI X1SL1, UBET 11, UBET 21, UBET, 31, UBET 41, UBET 61



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

KBLUE	STANDARD	ETH-TEL01
KEY	STANDARD	900TXB-42R, SUB44, TXB-44R, TXG-44R
KING GATES	STANDARD	STYLO, CLIPPER
KLING	STANDARD	KUA, KUA E, KUA S
LABEL	STANDARD	SPYCO, RJW4E
LEB	STANDARD	TMW
LINCE	STANDARD	LR2035
LIFE	STANDARD	FIDO
LINEAR	STANDARD	MCT-11, ACT-21. ACT-22, STING RAY ACT-31, STINGRAY ACT34B
MHOUSE	STANDARD	TX4
MA	STANDARD	TX1, TX2, TX3
MARATEC	STANDARD	D101, D12, DIGITAL302, DIGITAL304
MERLIN/PROLIFT	STANDARD	M230T(PROLIFT), M340R(PROLIFT)
MERLIN2.0	STANDARD	E945M, E943M, E940M
MERLIN/PROLIFT	STANDARD	M842(GREEN REMOTE), M832(GREEN REMOTE), M844(GREEN REMOTE), C945, C940, C943
MHOUSE	AMC	TX4, TX3, GTX4
MOOVO	AMC	MT4G
MONSEIGNEUR	STANDARD	ARC
NICE	AMC	SMILO, FLOR-S, VERY-VR, INTI, FLO2, FLO4, FLOR-S ERA, ONE(ON),ON ERA, ERGO, PLANO, ONE(ON FM)
NORTON	STANDARD	NEO, TXCD, GO NORTON, GO MINI NORTON
NOVOTECNICA	AMC	BIXL
NOVOFERM	STANDARD	NOVOTRON 502-504-512MIX43-2, MTR40-2, MCHS43-2, MHS43(2-4), MNHS433(2-4), MCHS, MINI-NOVOTRON 504, MICRO-NOVOTRON 502, MICRO-NOVOTRON 504, MICRO-NOVOTRON 31, MICRO-NOVOTRON 51, MINI-NOVOTRON 30, MINI-NOVOTRON 50, MNHS
NOLOGO	STANDARD	ECO DIP
NORMSTAHL	STANDARD	T433
O & O	AMC	T.COM, TWIN, TX TWIN, TWIN TX2/TX4(NEO), T.COM R4-2/T.COM R4-4, T.COM R8-2/T.COM R8-4
OG	STANDARD	OG62,OG64
OPENOUT	STANDARD	TMQ
PECCININ	STANDARD	TX MEMBRANA
PORTAMATIC	STANDARD	MPH01, MPH02
PRASTEL	AMC	TC2E(4E), SLIM, BFOR,MPSTP2E, MPSTPF2, MPSTF4, MPSTF2RE, MPSTF4RE, MPSTP2E, MPSTP2E BLUE, MTE(MT4E,MT2E), TRQ-



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk

		P(TRQ4P,TRQ2P), MPSTLE(MPSTLE(MPSTL-1E, MPSTL-2E, MPSTL-4E)
PROEM	STANDARD	ER4C4ACS
PROGET	STANDARD	ETY_433N2, ETY_433N4
PUJOL	STANDARD	MARTE, P215, TWIN, VARIO, VARIO MARS, VARIO OCEAN, NEO
QUASAR	STANDARD	433
RIB	STANDARD	LITHIO
ROPER	STANDARD	NEO, GO ROPER, GO MINI ROPER
SABUTOM	STANDARD	BROVER, BROSTAR
SEA	STANDARD	SMART DIP
SEAV	STANDARD	BE-HAPPY RS(BE-HAPPY-RS1,BE-HAPPY-RS2,BE-HAPPY-RS3), BE-SMART RSX, BE-HAPPY RH1, BE-HAPPY RH2, BE-HAPPY RH3
SECULUX	STANDARD	NEO
SILVELOX	STANDARD	Mhz 2007, QUARZ SAW
SICE	STANDARD	4790207
SIMINOR	STANDARD	CVXNL, MITTO, SIM433
SECURVERA	STANDARD	SV R2C, SV R4C, SV R6C
SERAI	STANDARD	OG/52, OG54, OG82, OG84, OG/28, OG48, OG62, OG64
SIMINOR	STANDARD	S433(2T-4T), ER2C4ACS, ER4C4ACS
SOMFY	STANDARD	TELIS, K-EASY, K-EASY NEW, K-EASY OLD, MITTO, KEY GO RTS, TELIS RTS, KEYTIS RTS, KEYTIS RTS NS, ALARMA
SOMMER	STANDARD	4010, 4011, 4014 TX03-434-2, 4013 TX03-434-4, 4020 TX03-868-4, 4026 TX03-868-2, 4022 TX02-434-2, 4025 TX02-868-2, 4031 TX08-868-4
STAGNOLI	STANDARD	KALLISTO, VENUS AV223
TAU	AMC	250k-SLIMRP, 250K-SLIMR, 250T-4RP
TELCOMA	STANDARD	FM 402, FM 402E, FM400E, FM400
TOR LIFT	STANDARD	TORMIT4
VDS	AMC	TRQ P, ECO-R
VRAWFORD	STANDARD	EA433 4K, SMART2, SMART3
V2	V2 and AMC	PHOENIX 433-868, TXC, TSC, TRC, HANDY, SERIE ROYAL: TRR/43, TRR2/43, TRR4/43, PHOX 433



SSIHuset
Svane Electronic

Arildsvej 27, Gråmose, DK-7442 Engesvang
kunde@svane-el.com Tlf.: 70253010 www.svane-el.dk